SCIWIL
Display the Future...

SCIWIL

DISPLAY CATALOGUE

2027







SCIWIL
Changzhou Sciwil E-Mobility Technology Co., Ltd.
8th Huashan Middle Road, Changzhou, China 213022
86-136 8526 1866 stefanie@sciwil.com
www.sciwil.com

www.sciwil.com

CONTENTS

03 Center-Mount Display (TFT)
SW-M81 / A90T / K61 / K80 / K81 / K60 / Q60

10 Embedded Display (TFT)
SW-R20 / SW-R21 / SW-T10


12 Left-Mount Display (TFT)
SW-G32 / SW-G21 / SW-G19 / SW-G31

16 Color VA Displays
SW-A908 / SW-K58 / SW-K59 / SW-K56 / SW-M808X / SW-M818 / SW-K618 / SW-G519 / SW-G518 / EN08

27 Remote & LCU
SWK1 / SWK3/ SWK5 / LCU01 / LCU02

29 System Compatibility Advice
eMTB / Fat Tyre / eRoad / eCity / eCargo / Folding

SMART E-BIKE IOT SYSTEM

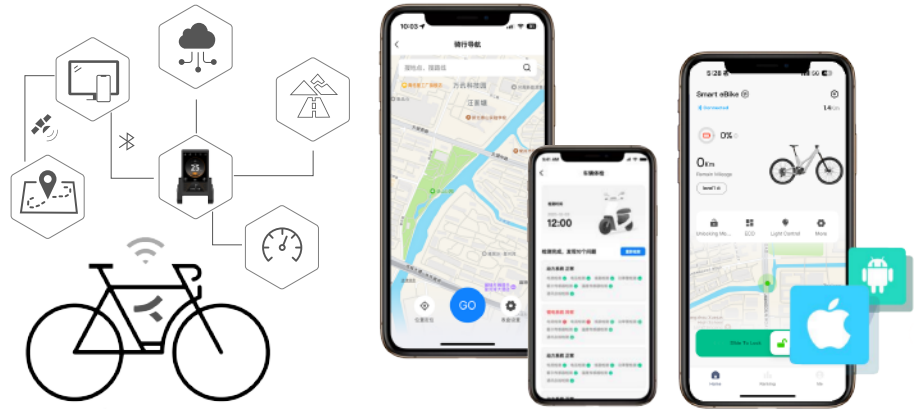

Smart Travel is an all-round app to connect your vehicles and turn them into smart intuitive transport. Working both as a console and a control center, Anyride shows riding range, battery status, service and navigation info all at a glance, and realize intelligent management of your vehicle. It's time to connect your vehicle for better riding experience!

CONNECT YOUR VEHICLE
Simply connect your vehicle with Smart Travel via Bluetooth, or scan the QR code. You will receive an OTA upgrade alert on your phone when there's an upgrade available. Stay connected!

RIDING INFO
On the Home screen, you can have a fast check of everything you need to know at a glance: vehicle photo and model, battery status, current speed, current mode/PAS level, light status, riding range and time, etc.


NAVIGATION
Smart Travel provides accurate GPS and navigation service, as well as records your riding route for handy lookup and resume.

VEHICLE CHECKUP
Before start, you may launch your Smart Travel App to have a overall checkup for your vehicle. In case of any failure reported, you may send a quick feedback to your dealer or service store.

VEHICLE MANAGEMENT
As a control center of your vehicle, you can set system unit, front light on/off, backlight brightness, speed limit (when supported), riding mode/PAS level etc for your vehicle.

LANGUAGE SUPPORT
Smart Travel supports multiple languages based on your system language.

IOS Android

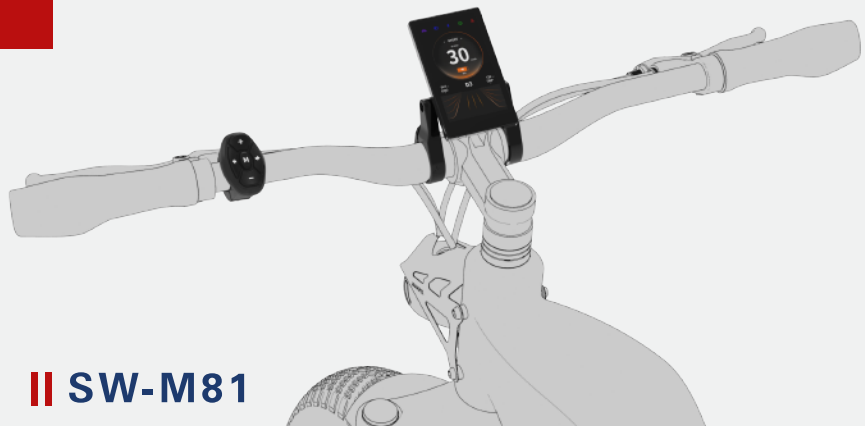

SW-M81

Functions

Assist Level, Speed, Single Trip Distance, Total Distance, Light On/Off,

Assist Modes, Power Output, Error Code, Light Sensor, Settings, USB Charge Port


Optional


- Boot Logo/Animation
- Real-Time Cruise
- Bluetooth
- Multi-Lingual
- Turning Signal
- Signal/Dual Drive
- Dual Batteries
- Customized Layout




Main Specs

Model : SW-M81
Type : 4.0" TFT Color Screen
Size : 99.78mm*59.68mm*64.36mm
Working Voltage : 12V-60V
Communication Mode : UART（Default）/ CAN（Optional）, Bluetooth5.0
Protection Ratings : IP66
Certification : CE, ROHS, EN13849









SW-A90(T)

Functions

Assist Level, Speed, Single Trip Distance, Total Distance, Light On/Off,

Assist Modes, Power Output, Error Code, Light Sensor, Settings、USB Charge Port


Optional


- Boot Logo/Animation
- Real-Time Cruise
- Touchscreen
- Multi-Lingual
- Turning Signal
- Signal/Dual Drive
- NFC Function
- Customized Layout
- Lights Detect./Ctrl.




Main Specs

Model : SW-A90(T)
Type : 5.0" TFT Color Screen
Size : 134.77mm*83.95mm*76.60mm
Working Voltage : 12V-100V
Communication Mode : UART（Default）/ CAN（Optional）, Bluetooth5.0
Protection Ratings : IP67
Certification : CE, ROHS, EN13849

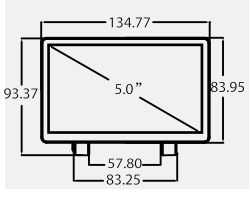







SW-K61

Functions

Assist Level, Speed, Single Trip Distance, Total Distance, Light On/Off,

Assist Modes, Power Output, Error Code, Light Sensor, Settings, USB Charge Port


Optional


- Boot Logo/Animation
- Real-Time Cruise
- Bluetooth
- Multi-Lingual
- Turning Signal
- Signal/Dual Drive
- Dual Batteries
- Customized Layout





Main Specs

Model : SW-K61
Type : 3.5” TFT Color Screen
Size : 93.55mm*61.35mm*62.18mm
Working Voltage : 12V-60V
Communication Mode : UART（Default）/ CAN（Optional）, Bluetooth5.0
Protection Ratings : IP66
Certification : CE, ROHS, EN13849







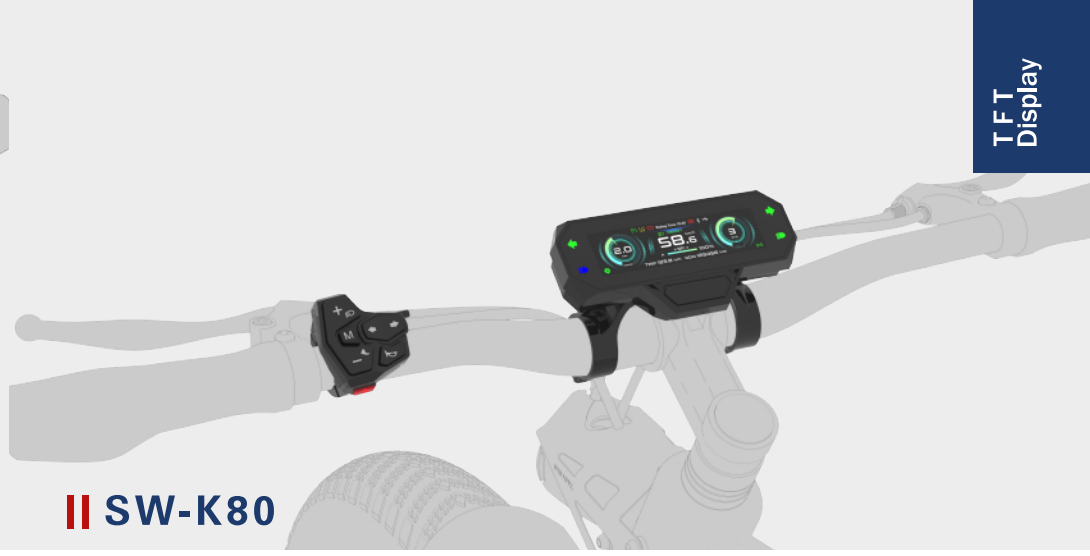

SW-K80

Functions

Assist Level, Speed, Single Trip Distance, Total Distance, Light On/Off,

Assist Modes, Power Output, Error Code, Light Sensor, Settings, USB Charge Port


Optional


- Boot Logo/Animation
- Real-Time Cruise
- Bluetooth
- Multi-Lingual
- Turning Signal
- Signal/Dual Drive
- NFC Function
- Dual Batteries
- Customized Layout




Main Specs

Model : SW-K80
Type : 3.9” TFT Color Screen
Size : 134.10mm*45.96mm*22.60mm
Working Voltage : 12V-100V
Communication Mode : UART（Default）/ CAN（Optional）, Bluetooth5.0
Protection Ratings : IP67
Certification : CE, ROHS, EN13849

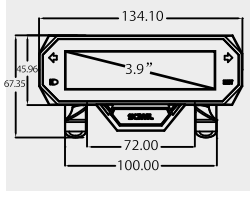



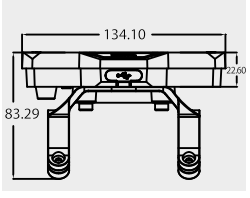



SW-K81

Functions

Assist Level, Speed, Single Trip Distance, Total Distance, Light On/Off,

Assist Modes, Power Output, Error Code, Light Sensor, Settings, USB Charge Port

Optional


- Boot Logo/Animation
- Real-Time Cruise
- Bluetooth
- Multi-Lingual
- Turning Signal
- Signal/Dual Drive
- NFC Function
- Dual Batteries
- Customized Layout








Main Specs

Model : SW-K81
Type : 4.0” TFT Color Screen
Size : 140.82mm*34.60mm*28.96mm
Working Voltage : 12V-100V
Communication Mode : UART（Default）/ CAN（Optional）, Bluetooth5.0
Protection Ratings : IP67
Certification : CE, ROHS, EN13849

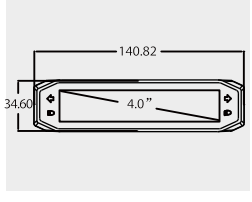





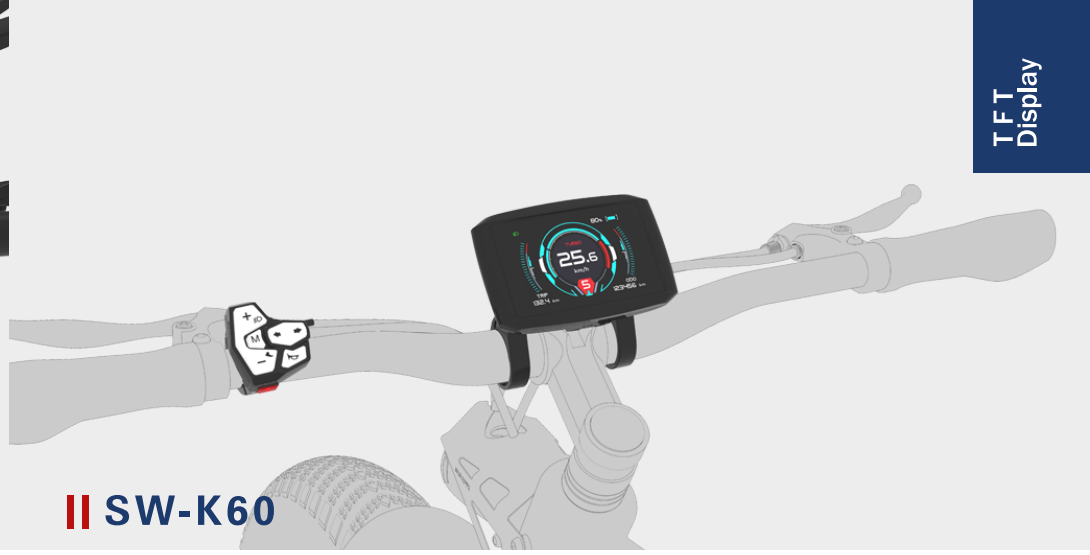

SW-K60

Functions

Assist Level, Speed, Single Trip Distance, Total Distance, Light On/Off,

Assist Modes, Power Output, Error Code, Light Sensor, Settings, USB Charge Port


Optional


- Boot Logo/Animation
- Real-Time Cruise
- Bluetooth
- Multi-Lingual
- Turning Signal
- Signal/Dual Drive
- NFC Function
- Dual Batteries
- Customized Layout





Main Specs

Model : SW-K60
Type : 3.5” TFT Color Screen
Size : 115.86mm*74.12mm*80.10mm
Working Voltage : 12V-100V
Communication Mode : UART（Default）/ CAN（Optional）, Bluetooth5.0
Protection Ratings : IP66
Certification : CE, ROHS, EN13849







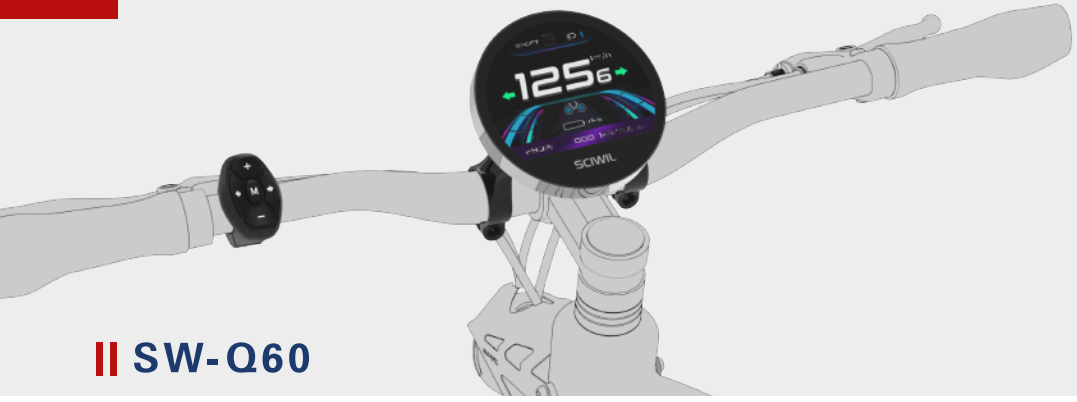

SW-Q60

Functions

Assist Level, Speed, Single Trip Distance, Total Distance, Light On/Off,

Assist Modes, Power Output, Error Code, Light Sensor, Settings

Optional


- Boot Logo/Animation
- Real-Time Cruise
- Bluetooth
- Multi-Lingual
- Turning Signal
- Signal/Dual Drive
- NFC Function
- Dual Batteries
- Customized Layout





SW-Q60

Main Specs

Model : SW-Q60
Type : 3.5” / 3.6” TFT Color Screen
Size : 110.95mm*110.95mm*28.29mm
Working Voltage : 12V-60V
Communication Mode : UART（Default）/ CAN（Optional）, Bluetooth5.0
Protection Ratings : IP66
Certification : CE, ROHS, EN13849

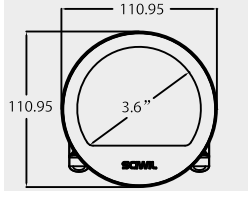







SW-R20 / SW-R21

Functions

Assist Level, Speed, Single Trip Distance, Total Distance, Light On/Off,

Assist Modes, Power Output, Error Code, Light Sensor, Settings


Optional


- Boot Logo/Animation
- Real-Time Cruise
- Bluetooth
- Multi-Lingual
- Turning Signal
- Signal/Dual Drive
- NFC Function
- Dual Batteries
- Customized Layout




Main Specs

Model : SW-R20 / SW-R21
Type : 2.0” TFT Color Screen
Size : 109.57mm*42.42mm*69.37mm / 90.00mm*50.00mm*84.09mm
Working Voltage : 12V-60V
Communication Mode : UART（Default）/ CAN（Optional）, Bluetooth5.0
Protection Ratings : IP66
Certification : CE, ROHS, EN13849

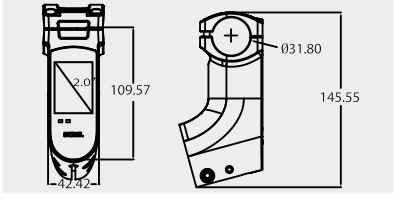

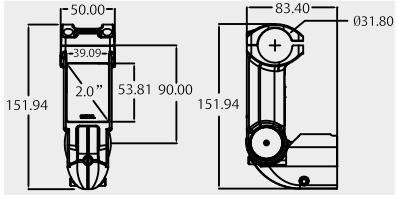

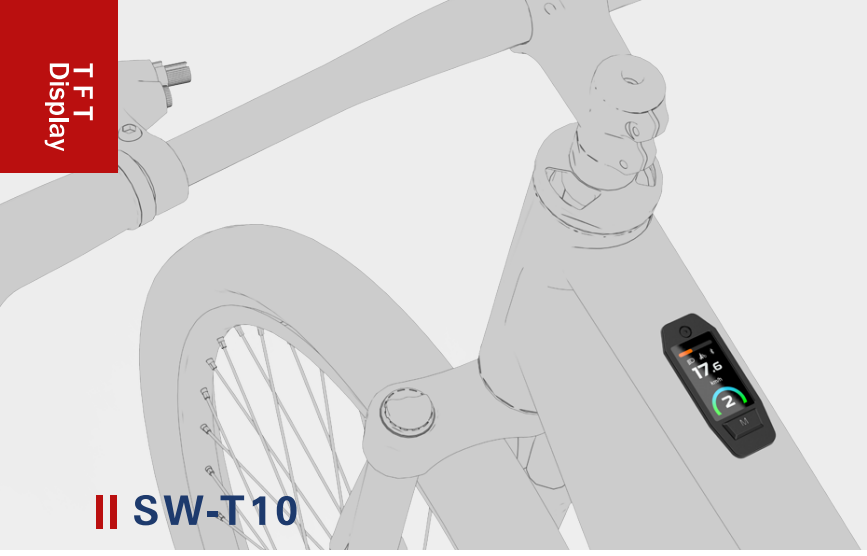

SW-T10

Functions

Assist Level, Speed, Single Trip Distance, Total Distance, Light On/Off,

Assist Modes, Power Output, Error Code, Settings


Optional


- Boot Logo/Animation
- Real-Time Cruise
- Multi-Lingual
- Turning Signal
- Signal/Dual Drive
- Dual Batteries
- Customized Layout





Main Specs

Model : SW-T10
Type : 1.47" TFT Color Screen
Size : 73.60mm*30.21mm*19.67mm
Working Voltage : 12V-100V
Communication Mode : UART（Default）/ CAN（Optional）
Protection Ratings : IP67
Certification : CE, ROHS, EN13849

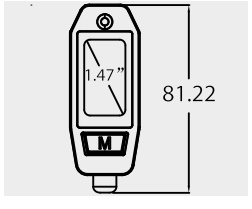

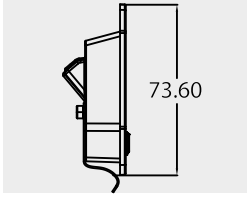

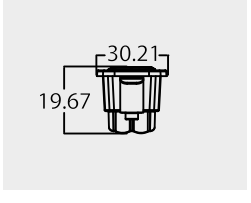

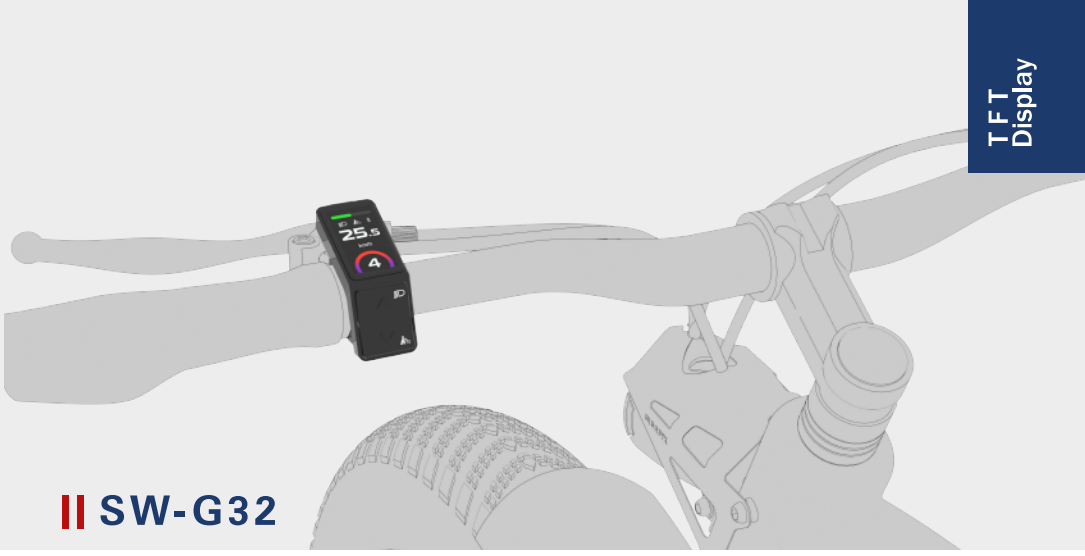

SW-G32

Functions

Assist Level, Speed, Single Trip Distance, Total Distance, Light On/Off,

Assist Modes, Power Output, Error Code, Settings


Optional


- Boot Logo/Animation
- Real-Time Cruise
- Multi-Lingual
- Turning Signal
- Signal/Dual Drive
- Dual Batteries
- Customized Layout




Main Specs

Model : SW-G32
Type : 1.47" TFT Color Screen
Size : 25.67mm*64.40mm*10.83mm
Working Voltage : 12V-100V
Communication Mode : UART（Default）/ CAN（Optional）
Protection Ratings : IP67
Certification : CE, ROHS, EN13849



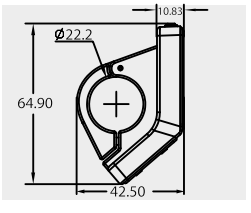

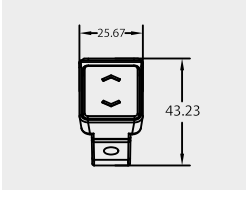



SW-G21

SW-G21

Functions

Assist Level, Speed, Single Trip Distance, Total Distance, Light On/Off, Assist Modes, Power Output, Error Code, Settings

Optional

- Boot Logo/Animation
- Real-Time Cruise
- Multi-Lingual
- Turning Signal
- Signal/Dual Drive
- Dual Batteries
- Customized Layout




SW-G21 A




SW-G21 B


Main Specs

Model : SW-G21
Type : 1.4" TFT Color Screen
Size : 40.20mm*34.79mm*12.32mm
Working Voltage : 12V-100V
Communication Mode : UART（Default）/ CAN（Optional）
Protection Ratings : IP67
Certification : CE, ROHS, EN13849






SW-G21



SW-G21 A



SW-G21 B



SW-G19

Functions

Assist Level, Speed, Single Trip Distance, Total Distance, Light On/Off, Assist Modes, Power Output, Error Code, Settings, USB Charge Port


Optional


- Boot Logo/Animation
- Real-Time Cruise
- Bluetooth
- Multi-Lingual
- Turning Signal
- Signal/Dual Drive
- Dual Batteries
- Customized Layout
- NFC Function





Main Specs

Model : SW-G19
Type : 1.9" TFT Color Screen
Size : 75.80mm*45.20mm*11.50mm
Working Voltage : 12V-100V
Communication Mode : UART（Default）/ CAN（Optional）, Bluetooth5.0
Protection Ratings : IP67
Certification : CE, ROHS, EN13849



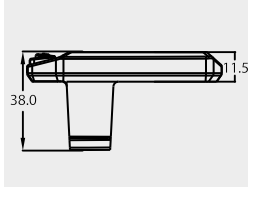



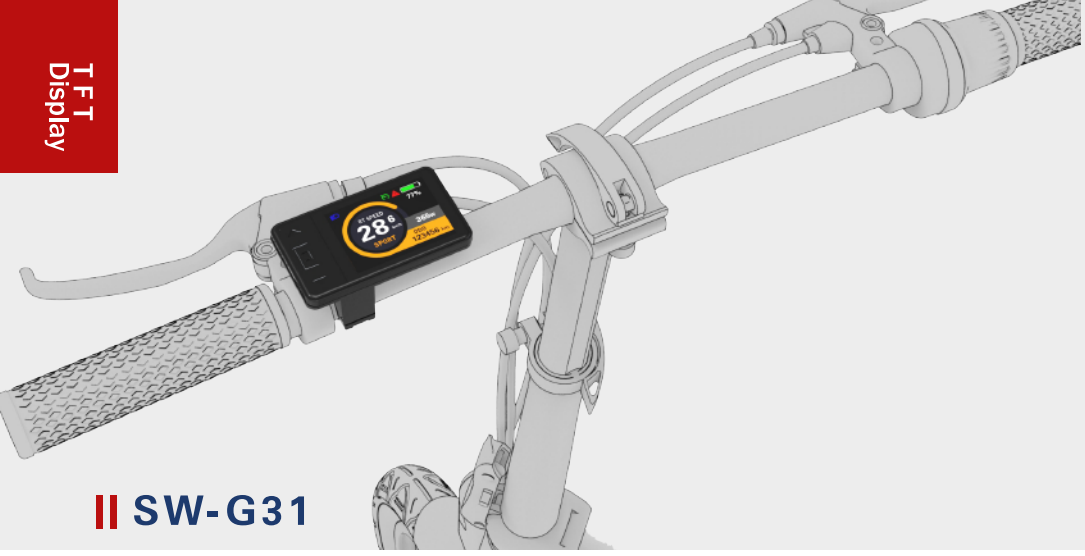

SW-G31

Functions

Assist Level, Speed, Single Trip Distance, Total Distance, Light On/Off,

Assist Modes, Power Output, Error Code, Settings, USB Charge Port


Optional


- Boot Logo/Animation
- Real-Time Cruise
- Bluetooth
- Multi-Lingual
- Turning Signal
- Signal/Dual Drive
- Dual Batteries
- Customized Layout
- NFC Function





Main Specs

Model : SW-G31
Type : 2.4" TFT Color Screen
Size : 81.92mm*47.99mm*43.72mm
Working Voltage : 12V-100V
Communication Mode : UART（Default）/ CAN（Optional）, Bluetooth5.0
Protection Ratings : IP67
Certification : CE, ROHS, EN13849







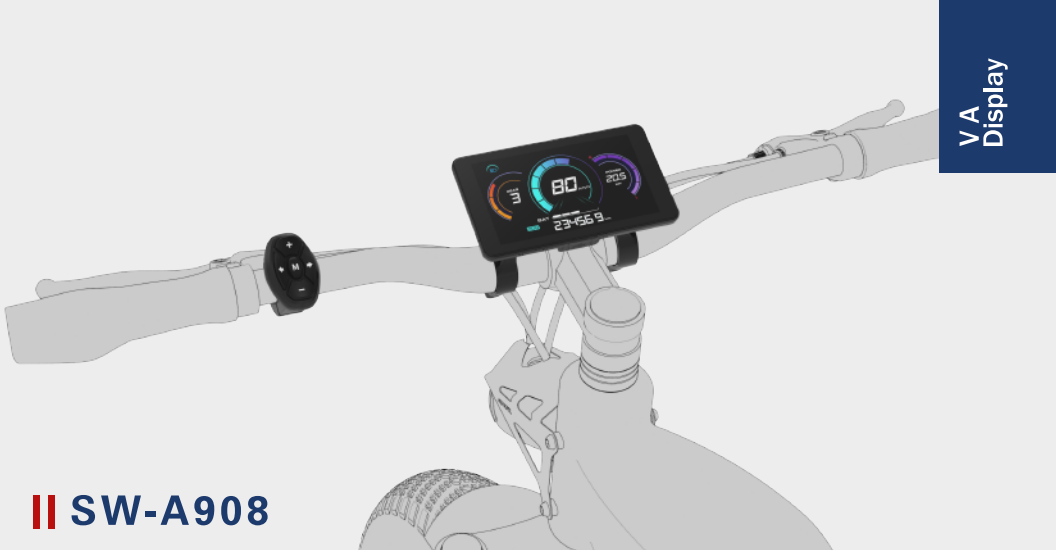

SW-A908

Functions

Assist Level, Speed, Single Trip Distance, Total Distance, Light On/Off,

Assist Modes, Power Output, Error Code, Light Sensor, Settings, USB Charge Port


Optional


- Real-Time Cruise
- Turning Ind./Ctrl.
- Bluetooth
- NFC Function
- Dual Batteries
- Signal/Dual Drive
- Charging Status
- Front Light Ind./Ctrl.
- Regen Brake Status
- Reverse Mode
- Component Temp





Main Specs

Model : SW-A908
Type : 5.0" VA Color Screen
Size : 134.77mm*83.95mm*76.60mm
Working Voltage : 12V-100V
Communication Mode : UART（Default）/ CAN（Optional）, Bluetooth5.0
Protection Ratings : IP67
Certification : CE, ROHS, EN13849

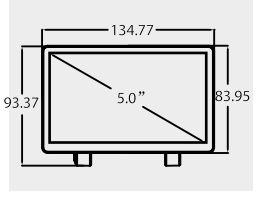

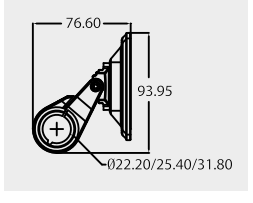

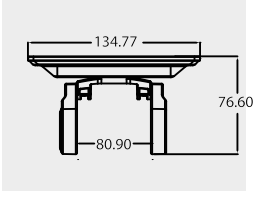

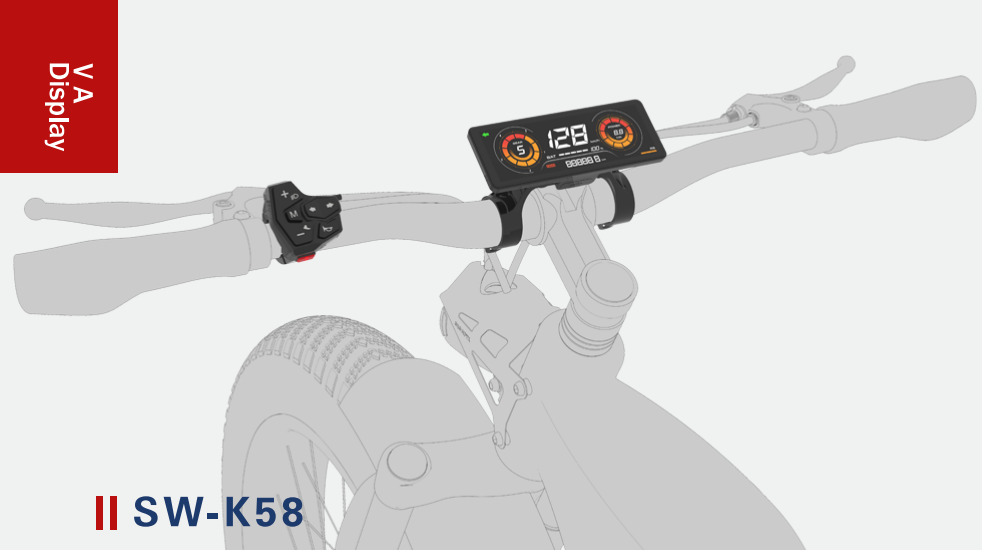

SW-K58

Functions

Assist Level, Speed, Single Trip Distance, Total Distance, Light On/Off,

Assist Modes, Power Output, Error Code, Light Sensor, Settings


Optional


- Real-Time Cruise
- Turning Ind./Ctrl.
- Bluetooth
- NFC Function
- Dual Batteries
- Signal/Dual Drive
- Charging Status
- Front Light Ind./Ctrl.
- Regen Brake Status
- Reverse Mode
- Component Temp




Main Specs

Model : SW-K58
Type : 4.58" TFT Color Screen
Size : 133.05mm*50.22mm*18.90mm
Working Voltage : 12V-100V
Communication Mode : UART（Default）/ CAN（Optional）, Bluetooth5.0
Protection Ratings : IP67
Certification : CE, ROHS, EN13849

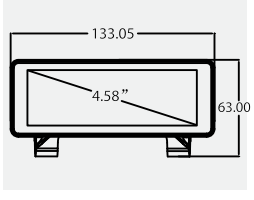

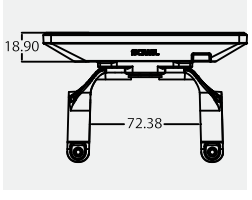

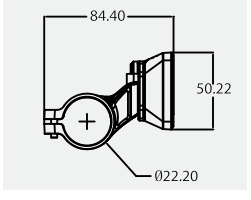



SW-K59

Functions

Assist Level, Speed, Single Trip Distance, Total Distance, Light On/Off,

Assist Modes, Power Output, Error Code, Settings, USB Charge Port


Optional


- Real-Time Cruise
- Turning Ind./Ctrl.
- Bluetooth
- NFC Function
- Dual Batteries
- Signal/Dual Drive
- Charging Status
- Front Light Ind./Ctrl.
- Regen Brake Status
- Wheelie Mode Status
- Component Temp
- Reverse Mode




Main Specs

Model : SW-K59
Type : 3.8" TFT Color Screen
Size : 119.97mm*40.20mm*16.80mm
Working Voltage : 12V-100V
Communication Mode : UART（Default）/ CAN（Optional）, Bluetooth5.0
Protection Ratings : IP67
Certification : CE, ROHS, EN13849

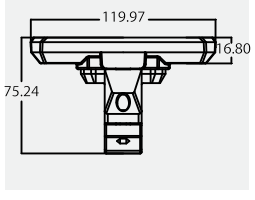

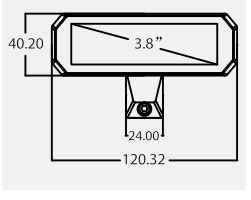

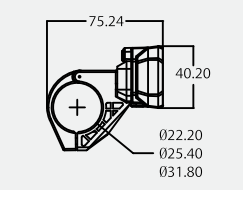



SW-K56

Functions

Assist Level, Speed, Single Trip Distance, Total Distance, Light On/Off,

Assist Modes, Power Output, Error Code, Settings, USB Charge Port


Optional


- Real-Time Cruise
- Turning Ind./Ctrl.
- Bluetooth
- NFC Function
- Dual Batteries
- Signal/Dual Drive
- Charging Status
- Front Light Ind./Ctrl.
- Regen Brake Status
- Wheelie Mode Status
- Component Temp
- Reverse Mode





Main Specs

Model : SW-K56
Type : 3.8" VA Color Screen
Size : 119.97mm*40.20mm*16.80mm
Working Voltage : 12V-100V
Communication Mode : UART（Default）/ CAN（Optional）, Bluetooth5.0
Protection Ratings : IP67
Certification : CE, ROHS, EN13849

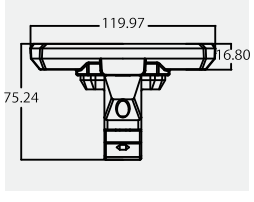

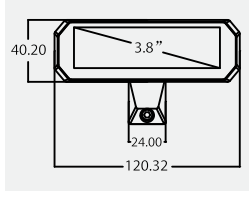



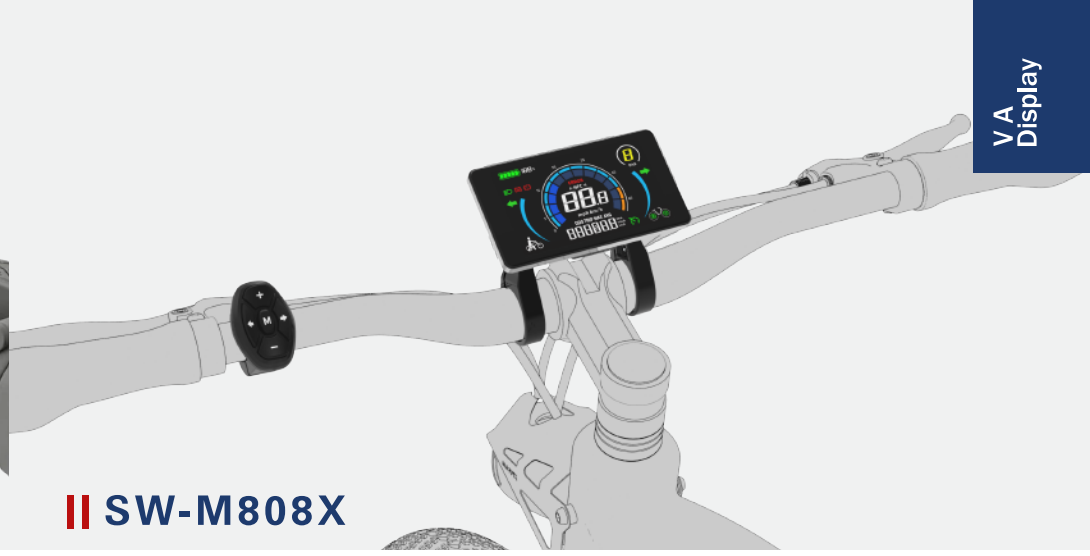

SW-M808X

Functions

Assist Level, Speed, Single Trip Distance, Total Distance, Light On/Off,

Assist Modes, Power Output, Error Code, Light Sensor, Settings, USB Charge Port


Optional


- Real-Time Cruise
- Turning Signal
- Bluetooth
- NFC Function
- Dual Batteries
- Signal/Dual Drive




Main Specs

Model : SW-M808X
Type : 4.0" VA Color Screen
Size : 114.34mm*63.47mm*80.10mm
Working Voltage : 12V-100V
Communication Mode : UART（Default）/ CAN（Optional）, Bluetooth5.0
Protection Ratings : IP66
Certification : CE, ROHS, EN13849









SW-M818

Functions

Assist Level, Speed, Single Trip Distance, Total Distance, Light On/Off,

Assist Modes, Power Output, Error Code, Light Sensor, Settings, USB Charge Port




Optional


Real-Time Cruise | Turning Signal | Bluetooth


NFC Function | Dual Batteries | Signal/Dual Drive

Main Specs

Model : SW-M818
Type : 4.0" VA Color Screen
Size : 99.78mm*59.68mm*64.36mm
Working Voltage : 12V-60V
Communication Mode : UART（Default）/ CAN（Optional）, Bluetooth5.0
Protection Ratings : IP66
Certification : CE, ROHS, EN13849









SW-K618

Functions

Assist Level, Speed, Single Trip Distance, Total Distance, Light On/Off,

Assist Modes, Power Output, Error Code, Light Sensor, Settings, USB Charge Port




Optional


Real-Time Cruise | Turning Signal | Bluetooth


NFC Function | Dual Batteries | Signal/Dual Drive

Main Specs

Model : SW-K618
Type : 3.5" VA Color Screen
Size : 93.55mm*61.35mm*62.20mm
Working Voltage : 12V-60V
Communication Mode : UART（Default）/ CAN（Optional）, Bluetooth5.0
Protection Ratings : IP66
Certification : CE, ROHS, EN13849









SW-G519

Functions

Assist Level, Speed, Single Trip Distance, Total Distance, Light On/Off,

Assist Modes, Power Output, Error Code, Settings, USB Charge Port


Optional





- Real-Time Cruise
- Turning Ind./Ctrl.
- Bluetooth
- NFC Function
- Dual Batteries
- Signal/Dual Drive
- Charging Status
- Front Light Ind./Ctrl.
- Regen Brake Status
- Wheelie Mode Status
- Component Temp


Main Specs

Model : SW-G19
Type : 1.9" VA Color Screen
Size : 75.80mm*45.20mm*11.5mm
Working Voltage : 12V-100V
Communication Mode : UART（Default）/ CAN（Optional）, Bluetooth5.0
Protection Ratings : IP67
Certification : CE, ROHS, EN13849

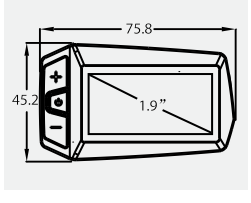

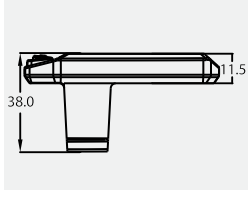



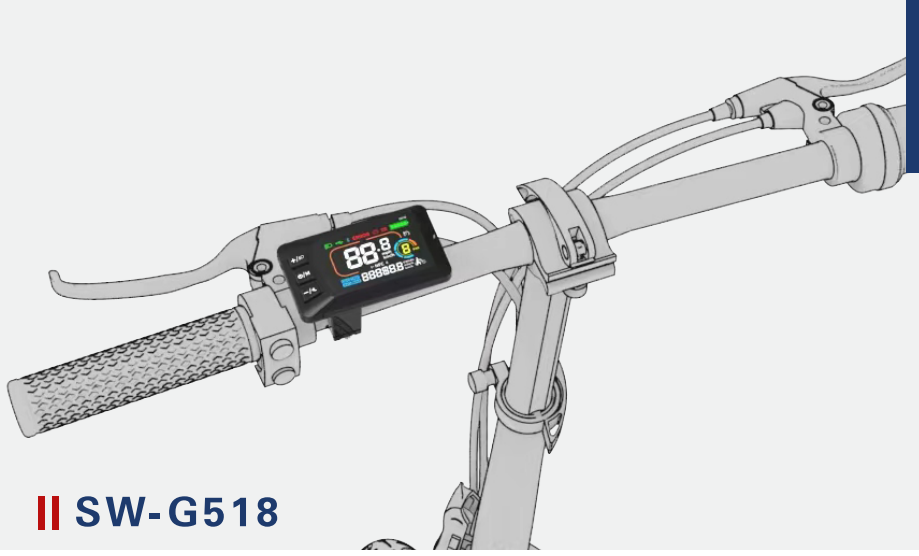

SW-G518

Functions

Assist Level, Speed, Single Trip Distance, Total Distance, Light On/Off,

Assist Modes, Power Output, Error Code, Settings, USB Charge Port


Optional





- Real-Time Cruise
- Bluetooth
- NFC Function
- Charging Status
- Front Light Ind./Ctrl.
- Signal/Dual Drive
- Wheelie Mode Status
- Component Temp
- Regen Brake Status

Main Specs

Model : SW-G518
Type : 2.3" VA Color Screen
Size : 82.00mm*48.00mm*44.87mm
Working Voltage: 12V-100V
Communication Mode : UART（Default）/ CAN（Optional）, Bluetooth5.0
Protection Ratings: IP65
Certification: CE, ROHS, EN13849









EN08

Functions


Assist Level, Speed, Single Trip Distance, Total Distance, Light On/Off, Assist Modes, Power Output, Error Code, Settings, USB Charge Port


Optional


Real-Time Cruise Bluetooth

Main Specs

Model : EN08
Type : 1.9" VA Color Screen
Size : 60.10mm*46.10mm*46.50mm
Working Voltage: 24V-60V
Communication Mode : UART（Default）
Protection Ratings: IP65
Certification: CE, ROHS, EN13849








LED Products


S810



Main Specs

Model : S810
Type : 2.9" LED
Working Voltage : 24V/36V/48V
Working Temperature : -20~70° C
Function Display : On/Off, Mode, Assist Level, Light On/Off, Walk Assist, Real-Time Cruise, Auto-Off, Battery Level
Protection Ratings: IP54
Certification: CE, ROHS, FCC

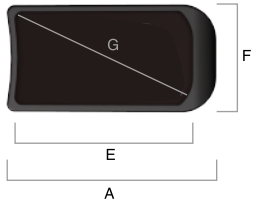



Size A	81.7mm
Size B	42.3mm
Size C	49.6mm
Size D	∅ 22.2mm
Size E	64.43mm
Size F	42.3mm
Size G	2.9" inch

G20



Main Specs

Model : G20
Type : 1.9" LED
Working Voltage : 24V/36V/48V
Working Temperature : -20~70° C
Function Display : On/Off, Mode, Assist Level, Walk Assist, Real-Time Cruise, Auto-Off, Battery Level
Protection Ratings: IP54
Certification: CE, ROHS, FCC






Size A	46.0mm
Size B	11.5mm
Size C	40.0mm
Size D	∅ 22.2mm
Size E	37.0mm
Size F	65.0mm
Size G	1.9" inch


Remote Series






Model	SWK1
Icon Backlight	✓
Icons	⊕ ⊖ Ⓜ
Applications	eMTB / Fat Tyre / eRoad / eCity / eCargo / Folding
Position	Handlebar (Dia. 22.2mm)
Installation	Bolt & Screw Fixure
Certifications	ROHS / IP54





Model	SWK3
Icon Backlight	✓
Icons	⊕ ⊖ Ⓜ
Applications	eMTB / Fat Tyre / eRoad / eCity / eCargo / Folding
Position	Handlebar (Dia. 22.2mm)
Installation	Bolt & Screw Fixure
Certifications	ROHS / IP66






	SWK5-A / SWK5-B
	✓
	⊕ ⊖ Ⓜ ⬅ ➡
	eMTB / Fat Tyre / eRoad / eCity / eCargo / Folding
	Handlebar (Dia. 22.2mm)
	Bolt & Screw Fixure
	ROHS / IP66

LCU Series





Model	SW-LCU01
Size	51.0mm*66.0mm
Input Volt	12V
Max. Current	10A
Function	Turning/Position/Front Lights/Horn
Protection Rating	IP67

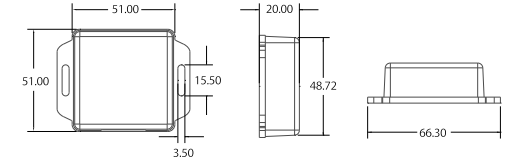



Model	SW-LCU02
Size	51.0mm*66.0mm
Input Volt	72V
Max. Current	1A
Function	Turning/Position/Front Lights/Horn
Protection Rating	IP67

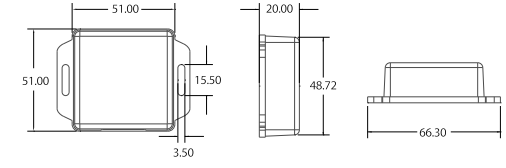

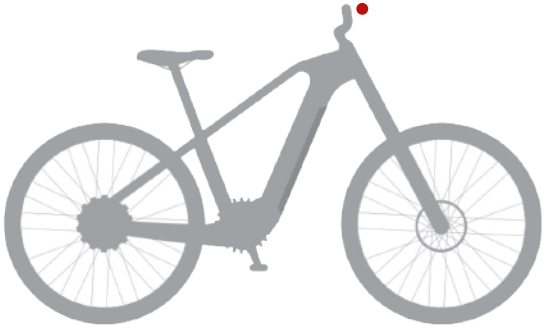

Displays for eMTB



SW-M808X



SW-M818




SW-M81



SW-T10



SW-R20



SW-G21




M5



SW-M61



SW-M618

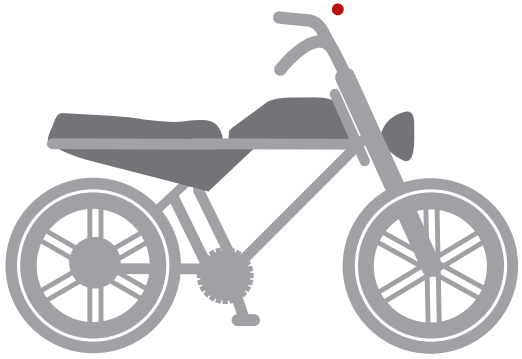

Displays for Dirt Bike/Motocross/Fat eBike



SW-K80



SW-K81



SW-A908



SW-K58



SW-K56



SW-K59




SW-G32



SW-G31



SW-G519

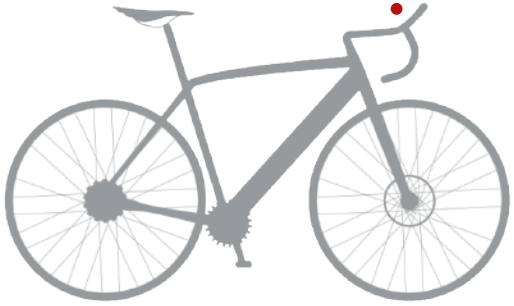

Displays for eRoad/ eGravel



SW-R20



SW-T10



SW-M81



SW-K618



SW-G21



SW-K61




G32



Displays for eCity



SW-R21



SW-M61



SW-R20




SW-K618



M5



SW-K61




M818



SW-G21



SW-G32

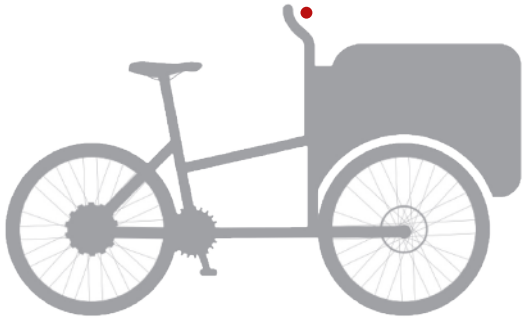

Displays for eCargo



SW-M81



SW-A90



SW-G21



SW-G31



SW-M818 / M808X



SW-K618




SW-G518



EN08



S810 / G20

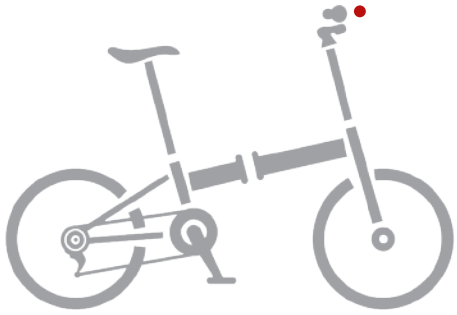

Displays for eFolding



SW-R20



SW-G31



SW-G518



EN06 / EN08



SW-G21



SW-G32

Ebike Display