


SW-Q60 / Q61
SW-Q30

- Screen Size: 3.5" / 3.6" / 2.8"
- Protection Rate: IP66
- Working Voltage: 12V-100V
- Working Temperature: -30°C~85°C
- Protocol: CAN / UART
- Functions: USB / NFC / Light Sensor,
- Light Guide / BLE / Boot Animation




for retro e-Motorcycles

DASHBOARD
2026

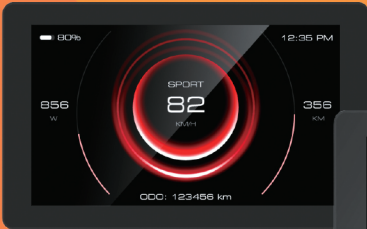

SW-D62 / SW-D70
Motorcycle Dashboard

- Screen Size: 6.2" / 7.0"
- Protection Rate: IP66
- Working Voltage: 12V-100V
- Working Temperature: -30°C~85°C
- Functions: BLE / Carplay / Touchscreen / Rear Camera
- Protocol: CAN / RS485 / RS232 / One-Bus

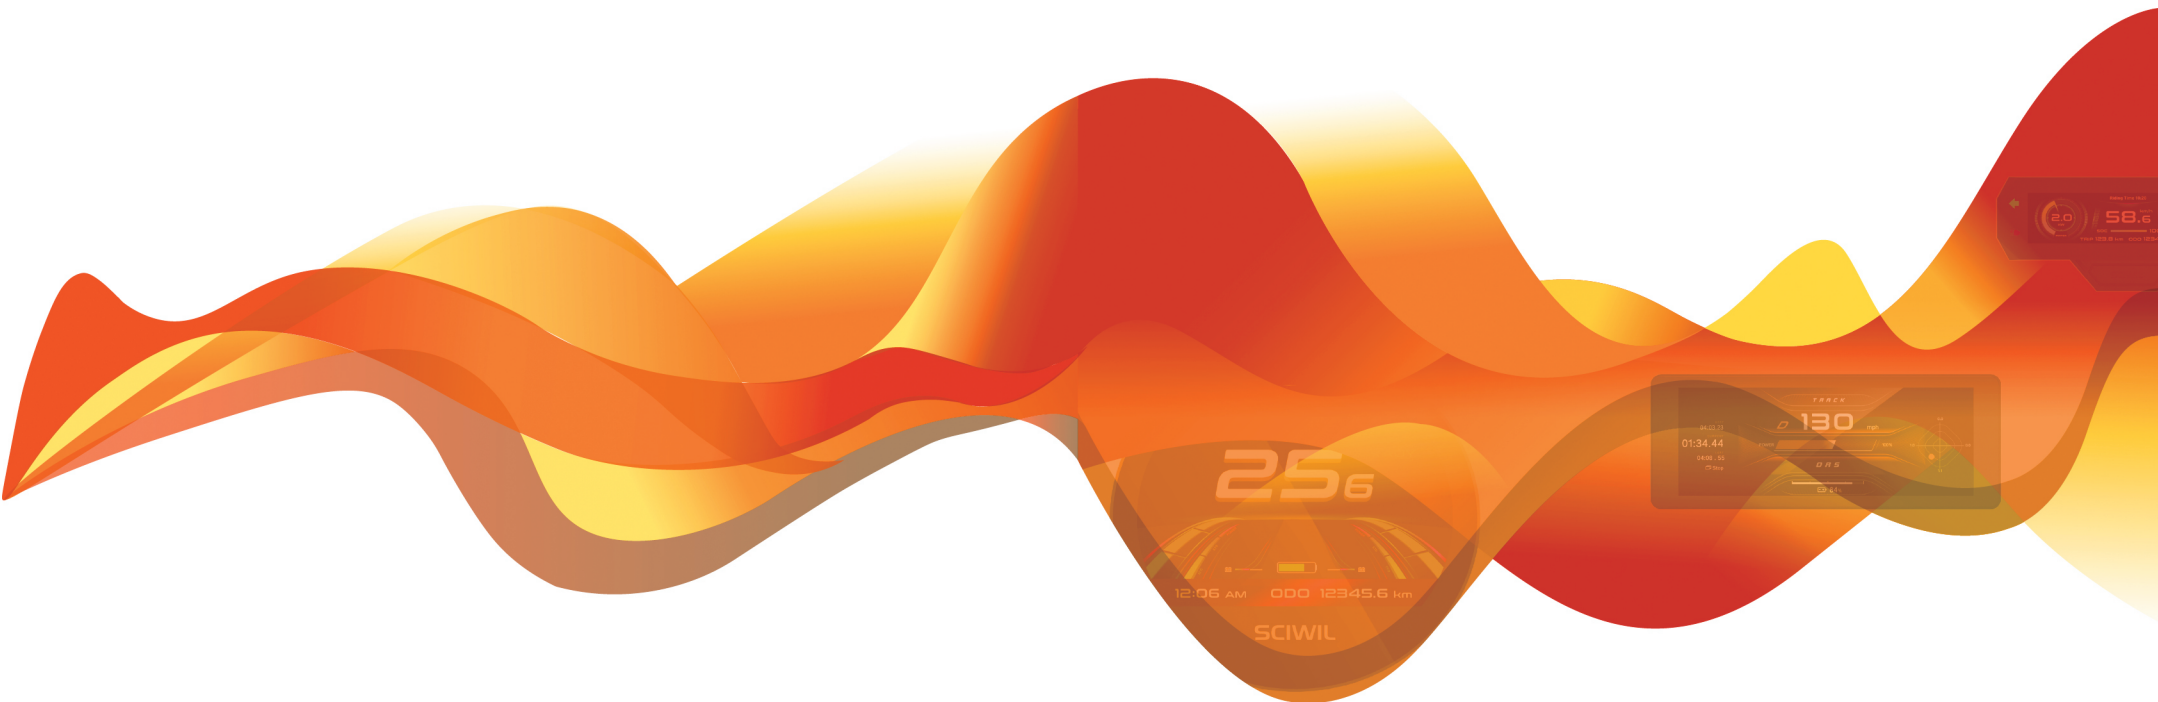



SW-D68

SW-K82

eMotorcycle Dashboard

Screen Size: 3.9–7.0in Protocol: CAN / UART / RS485 Protection Rate: IP66
Voltage: 12V–100V Working Temp: –30°C~85°C Function: BLE / Carplay /Touch / Rear Camera

Customized Projects

- +

UI Customization
- +

Customer Protocol
- +

Boot Logo / Animation
- +

Hardware Design
- +

Exterior / Structural Design

01 Mini-Compact

- ⚠

12V–72V
- ☀

IP66
- 📏

1.4in / 1.47in
- ⚙

BLE / CAN



SW-G21

SW-G32

02 Left–Mount

- ⚠

12V–72V
- ☀

IP66
- 📏

2.4in
- ⚙

BLE / NFC / CAN



SW-G518

SW-G31

03 Full-Size

- ⚠

12V–100V
- 📏

5.0–7.0in
- ☀

IP66
- ⚙

BLE / Carplay /Touch / Rear Camera



SW-D50

SW-D70

Street / Fat Bike

- ⚠

12V–100V
- 📏

5.0in
- ☀

IP66
- 👆

Touchscreen

SW-A90



SW-K80 for Off–Road Bikes

- Screen Size: 4.0”
- Working Voltage: 12V–100V
- Working Temperature: –30°C~85°C
- Protocol: CAN / RS485 / RS232 / ONE–BUS
- Functions: USB / NFC / Light Sensor / Light Indicator / BLE / Speaker



SW-K81 for Off–Road Bikes

- Screen Size: 4.0”
- Working Voltage: 12V–100V
- Working Temperature: –20°C~70°C
- Protocol: CAN / RS485 / RS232 / ONE–BUS
- Functions: Touch Button / NFC / Light Sensor / Light Guide / BLE / Speaker



SW-K58 for e–Motorcycles

- Screen Size: 4.58”
- Working Voltage: 12V–100V
- Working Temperature: –30°C~85°C
- Protocol: CAN / RS485 / RS232 / ONE–BUS
- Functions: NFC / Light Sensor / BLE



SW-K82 / SW-D60

- Screen Size: 4.82” / 6.0”
- Working Voltage: 12V–100V
- Working Temperature: –30°C~85°C
- Protocol: CAN / RS485 / RS232 / ONE–BUS
- Functions: BLE / Carplay / Touchscreen / Rear Camera

